ULTIMA RB5 SP — RB5SP2 WC SET UP SHEET


KYOSHO — THE FINEST RADIO CONTROL MODELS

Name	Date	Truck / City	Event


Front Suspension




Upper Spacer: ____ mm



4.8mm Ball Stud:
- ☐ UM128(WC Edition)
- ☐ UMW508 (+2mm High Mount)



Camber: ____ ° (- / +)



Ackerman Steer Spacer: ____ mm

4.8mm Ball Stud:
- ☐ LA246(WC Edition)
- ☐ UM129(Std)


Axle Type:
- ☐ UM506(Std/Steel)
- ☐ UM569(WC Edition)

Shock Stay:
- ☐ UM511(RB5)
- ☐ UM525(WC Edition)

Bump Steer Spacer: ____ mm


Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Axle Height Spacer:
- ☐ Up
- ☐ Down



Toe: ☐ In ☐ Out ____ °

Front Bulkhead Weight Placement:
- ☐ None
- ☐ Bulkhead Inside ____ oz ____ g
- ☐ On the skid plate ____ oz ____ g * 1oz=28g




Caster Spacer:
- ☐ 25° ☐ 0.5
- ☐ 30° ☐ 1.0
- ☐ None

Wheelbase: ☐ Long ☐ Middle ☐ Short

Comments:

Rear Suspension

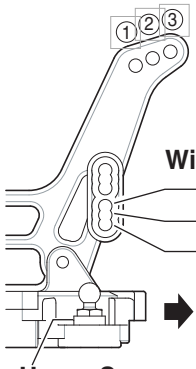


Shock Stay:
- ☐ UM512(RB5)
- ☐ UMW501
- ☐ UM520(RB5 SP)
- ☐ UM520S(WC Edition)

Sus Holder Spacer:

	F	R
☐	0.5	0.5
☐	1.0	1.0
☐	None	None


Anti-Squat: ____ °



Upper Spacer: ____ mm

Type-B (UM519)

Type-B2 (UM519-2)




Wheelbase:
- ☐ Long
- ☐ Middle
- ☐ Short

Rear Hub add Toe:
- ☐ 0°Type-B (UM519)
- ☐ 0°Type-B2 (UM516-2)
- ☐ 0°Alu (UMW516-0)
- ☐ 0.5°Alu (UMW516-05)
- ☐ 1°Alu (UMW516-1)

Wing Height:
- ☐ 1
- ☐ 2
- ☐ 3


Sway Bar: ☐ None ☐ ____mm





Camber: ____ ° (- / +)

Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Lower Arm:
- ☐ UM566(WC Edition)
- ☐ UM521(SP2)

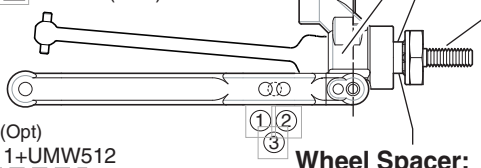

Wheel Shaft Type:
- ☐  UM522-02(RB5 SP)
- ☐  UM510-02(RB5)

Swing Shaft:
- ☐ 62.5mm:UM510,UM510-01(RB5)
- ☐ 65.5mm:UM522,LA232-01(RB5 SP)

Upper Spacer: ____ mm

Lower Sus Holder:

	Normal	Aluminum(Opt)
Narrow	☐ RF:RB5	☐ UMW511+UMW512
Wide	☐ RF2:RB5SP	☐ UMW514+UMW515


Wheel Spacer: ____ mm

Comments:

Editable by Arn0 at PetitRC.com

Shock

	Front	Rear
Shock Piston:		
Shock Oil:	#	#
Shock Spring:		
Limiters:	in mm / out mm	in mm / out mm
Shock Length(A):	____ mm	____ mm
Shock Top Type:	☐ Std:RB5 ☐ Low:ZX5FS	☐ Std:RB5 ☐ Low:ZX5FS



5.8mm Ball End:
- Front: S☐ M☐ L☐
- Rear: S☐ M☐ L☐

Truck Condition

- ☐ Smooth
- ☐ Bumpy
- ☐ Low Truction
- ☐ Med. Truction
- ☐ Higt Truction
- ☐ Wet
- ☐ Dry
- ☐ Sandy
- ☐ Soft Dirt
- ☐ Grass
- ☐ Blue Groore
- ☐ Clay
- ☐ Dusty
- ☐ Other

Kind in spring:

Soft	Pink
	White
	Gold
	Red
	Yellow
	Orange
Hard	Green

Body / Wing / Chassis

Wing: _____ Body: _____

Lip hight: _____

Wing Angle: 4° ☐ 7° ☐ 10° ☐




Ride Height: F ____ mm R ____ mm

Battery Placement: ☐ Front ☐ Rear

Battery Post: ☐ Pla ☐ Alu

Weight Placement: * 1oz=28g



Tire

	Front	Rear
Tire:		
Inserts:		
Wheel:		
Traction Compound:		

Comment :

Electronics

Motor: _____

Pinion/Spur: _____

Battery: _____

ESC: _____

Radio: _____

Servo: _____

Throttle/Brake:

EPA: _____ Expo: _____

Initial brake: _____

Drag brake: _____

Throttle profile: _____

Steering expo: _____

Steering speed: _____