Driver and Event

Name
Date
Event
Weather
Result

Track Conditions

Surface
Grip Level
Track Condition

COUGAR KF

Additional Settings

Car Weight
Washers Between
CTR and Bellcranks mm
Bump Steer Washers mm
Wing Gurney Height mm
NOTES

Electrics and Gearing

E.S.C
Servo
Reciever
Batteries
Motor
Spur
Pinion
Side Gears 23T/33T Kit ☐ 21T/35T ☐ 25T/31T ☐

Wheels and Tyres

Rear Wheels
Rear Tyre
Rear Insert
Front Wheels
Front Tyre
Front Insert

Diff Type


Ball ☐ Gear ☐

Diff Oil

Front Shocks

Oil | Spring | Shock Cap Sealed ☐ Vented ☐ Emulsion ☐ | Piston

Drilled ☐ | Hole Size mm



Shock Length mm

Rear Shocks


Oil | Spring | Shock Cap Sealed ☐ Vented ☐ Emulsion ☐ | Piston

Drilled ☐ | Hole Size mm




Shock Length mm

Front Suspension

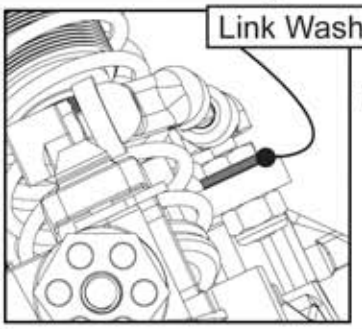

Link Washers mm

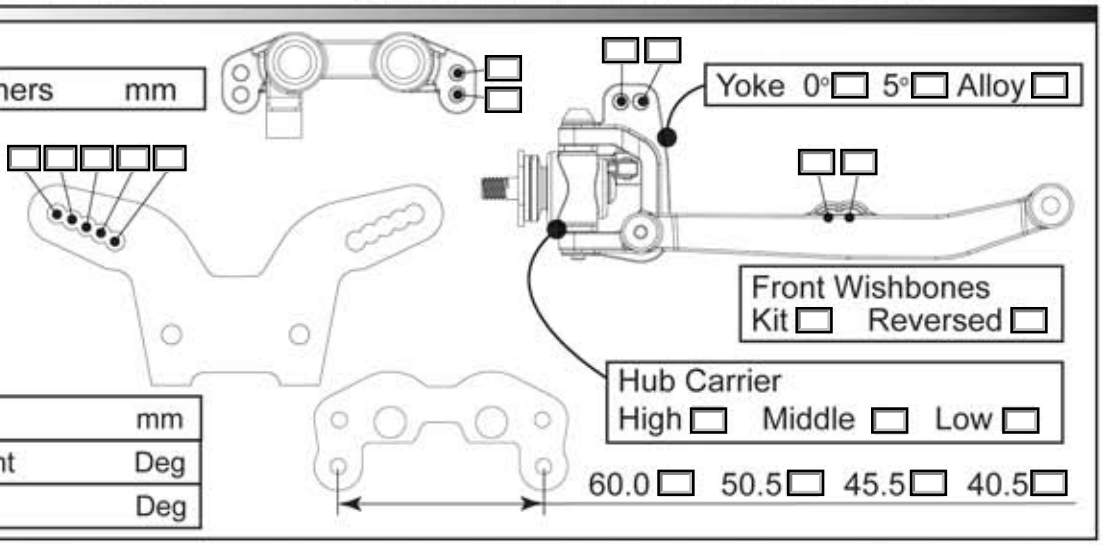

Yoke 0° ☐ 5° ☐ Alloy ☐

Front Wishbones Kit ☐ Reversed ☐

Hub Carrier High ☐ Middle ☐ Low ☐

60.0 ☐ 50.5 ☐ 45.5 ☐ 40.5 ☐

Front Ride Height	mm
Front Camber at Ride Height	Deg
Front Toe In	Deg

Rear Suspension

Anti roll bar No ☐ 1.00 ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐

Wheelbase Short ☐ Med ☐ Long ☐


Camber at Ride Height Deg


Ride Height mm

Rear Toe-in & Track Washers

0.00 Difference = 0.00° Toe-in ☐
0.50 Difference = 0.60° Toe-in ☐
1.00 Difference = 1.30° Toe-in ☐
1.50 Difference = 1.95° Toe-in ☐
2.00 Difference = 2.60° Toe-in ☐
2.50 Difference = 3.25° Toe-in ☐
3.00 Difference = 3.90° Toe-in ☐

Rear mm Front mm

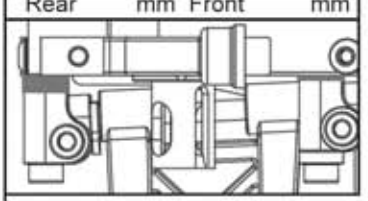

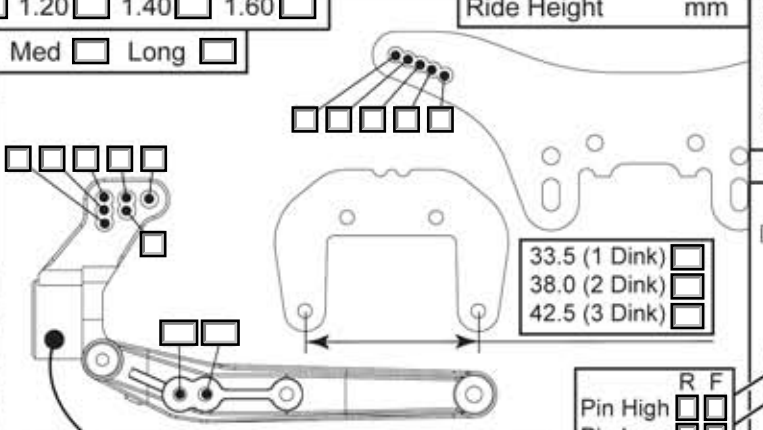

33.5 (1 Dink) ☐
38.0 (2 Dink) ☐
42.5 (3 Dink) ☐

R F
Pin High ☐ ☐
Pin Low ☐ ☐

Rear Hub Carrier Alloy ☐ Std ☐


Alloy Hub Carrier +1° ☐ -1° ☐

Blocks Moulded ☐ Alloy ☐

Anti-squat Washers

0.00 Difference = 0.00° Anti-squat ☐
0.50 Difference = 0.60° Anti-squat ☐
1.00 Difference = 1.30° Anti-squat ☐
1.50 Difference = 1.95° Anti-squat ☐
2.00 Difference = 2.60° Anti-squat ☐
2.50 Difference = 3.25° Anti-squat ☐
3.00 Difference = 3.90° Anti-squat ☐

Rear mm Front mm

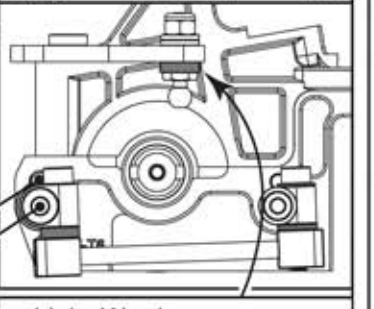

Link Washers mm