Setup Sheet

ECLIPSE 2 — A NEW BEGINNING

DRIVER DETAILS

NAME	
DATE	
EVENT	
LOCATION	
RACE RESULT	
QUALIFYING POSITION	
FASTEST LAP TIME	

TRACK CONDITIONS


GRIP LEVEL	High ☐	Medium ☐	Low ☐
TYPE	Tight ☐	Mixed ☐	Open ☐
SURFACE			
CONDITION	Smooth ☐	Bumpy ☐	
TRACK DIMENSIONS			
TEMPERATURE		°C	°F

MOTOR AND GEARING

MOTOR	
MOTOR OPTIONS	
ROTOR DIAMETER	
TIMING	
SPUR GEAR SIZE	
PINION SIZE	
ROLLOUT	mm / rev

NOTES

TOPDECK STIFFNESS ADJUSTMENT

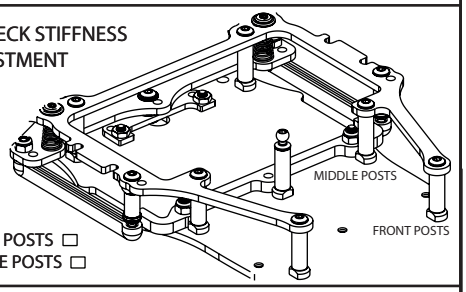

FRONT POSTS ☐
MIDDLE POSTS ☐

TYRES AND ADDITIVE

	Front	Rear
COMPOUND		
FOAM DIAMETER	mm	mm
TYRE ADDITIVE		
ADDITIVE TIME	minutes	minutes
ADDITIVE COVERAGE	%	%
SIDEWALL GLUE	☐	☐


ELECTRICS AND BODYSHELL

BODYSHELL	HEIGHT
FRONT PIN HEIGHT	BOTTOM 0☐ 1☐ 2☐ 3☐ 5☐ TOP
FRONT HANGERS	1 DOT☐ 2 DOT☐ 3 DOT☐
REAR PIN HEIGHT	BOTTOM 1☐ 2☐ 3☐ 4☐ 5☐ TOP
REAR HANGERS	1 DOT ☐ 2 DOT ☐ 3 DOT ☐
E.S.C	
SERVO	
RECEIVER	
LiPo	

FRONT

CAMBER	0.75° ☐	1.5° ☐
RIDE HEIGHT		mm
TOE OUT		degrees/side
KINGPIN DAMPING		cSt
DROOP		mm
CASTER	WASHER A (REAR)	mm
	WASHER B (FRONT)	mm
	CASTER ANGLE	degrees

SILVER SHIMS X.....
BLACK SHIMS X.....




SILVER SHIMS X.....
BLACK SHIMS X.....


FRONT SPRINGS

- ☐ BLACK - SOFT
- ☐ SILVER - MEDIUM
- ☐ GOLD - HARD
- ☐ WHITE - ULTRA

Rear

RIDE HEIGHT		mm
ROLL DAMPING		cSt
BUMP DAMPING		cSt
DROOP		mm
ANTI SQUAT	KIT ☐	ANTI SQUAT ☐ .....
DIFF PRELOAD	360° KIT ☐	..... ° ☐
PIVOT LENGTH	LONG ☐	SHORT ☐

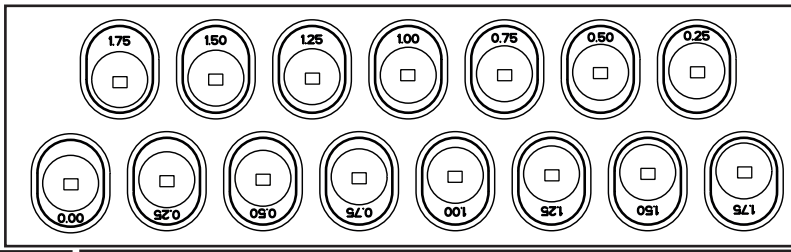

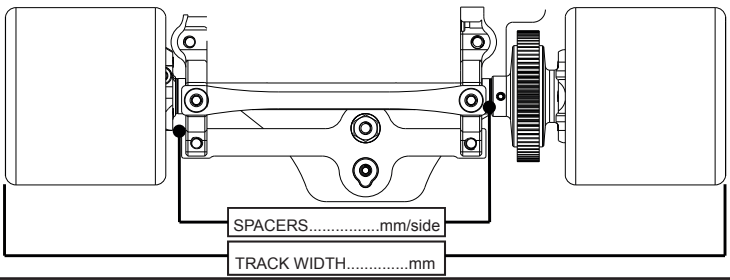

ROLL SPRINGS (SIDE)

SOFTER					HARDER
U4838 BLACK ☐	U4839 SILVER ☐	U4840 GOLD ☐	U4841 NICKEL ☐	U7322 RED DOT ☐	U7323 BLACK ULTRA ☐

BUMP SPRING (CENTRE)

SOFTER					HARDER
U4838 BLACK ☐	U4839 SILVER ☐	U4840 GOLD ☐	U4841 NICKEL ☐	U7322 RED DOT ☐	U7323 BLACK ULTRA ☐