DRIVER DETAILS

NAME	
DATE	
EVENT	
WEATHER	
RESULT	
FASTEST LAP TIME	

NOTES

TOP DECK CONNECTOR YES ☐ NO ☐

Mi6 EVO racing intelligence evolved

Schumacher racing-cars.com

CHASSIS AND ELECTRICS

CHASSIS			Alloy ☐	Carbon ☐
TOP DECK	2.0mm ☐	2.5mm ☐	3.0mm ☐	4.0mm ☐
BODYSHELL				
WING				
E.S.C				
SERVO				
RECEIVER				
CELLS				

MOTOR AND GEARING

MOTOR		
ROTOR DIAMETER		
TIMING		
GEAR PITCH	48DP ☐	64DP ☐
SPUR SIZE		
PINION SIZE		

TRACK CONDITIONS

GRIP LEVEL	High ☐	Medium ☐	Low ☐
TYPE	Tight ☐	Open ☐	Mixed ☐
SURFACE	Carpet ☐	Tarmac ☐	
CONDITION	Smooth ☐	Bumpy ☐	
TEMPERATURE		°C	°F
VENUE	Indoor ☐	Outdoor ☐	

WHEELS, TYRES AND INSERTS

WHEELS				
TYRES				
INSERTS				
TYRE ADDITIVE				
ADDITIVE TIME	Front	Minutes	Rear	Minutes
TYRE WARMERS	Yes ☐	No ☐	Temp °C	Time Minutes

FRONT



Spool ☐
Gear Diff ☐

Diff Oil ..... cTs

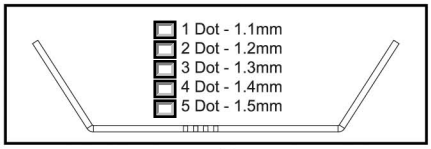

1 Dot - 1.1mm ☐
2 Dot - 1.2mm ☐
3 Dot - 1.3mm ☐
4 Dot - 1.4mm ☐
5 Dot - 1.5mm ☐



Washers .....mm
Washers.....mm



Washers
.....mm





4° Yoke ☐
6° Yoke ☐

Yes ☐
No ☐
SERVO SAVER



Washers .....mm



12mm ☐
13mm ☐
14mm ☐



.....mm
.....mm



Washers
.....mm

Droop.....mm
On 10mm Block ☐
Ride Height .....mm
Camber.....°
Toe.....°
Pivot Block Strap ☐



43.5 ☐ 44.2 ☐ 46.0 ☐

Line In ☐
Line Out ☐

Shims
.....mm

Shims.....mm





(X)

Cap Type Vented ☐ Sealed ☐ Emulsion ☐
Oil.....cTs
Spring.....
Piston.....
Drilled Yes ☐ No ☐
Drilled piston Hole Size.....mm
Shock Length (X).....mm
Rebound .....%



Peripheral Damping
Yes ☐
No ☐



Alloy ☐ Steel ☐ Double Joint ☐



Narrow ☐
Medium (kit) ☐



Washers
.....mm

REAR



Diff Oil ..... cTs

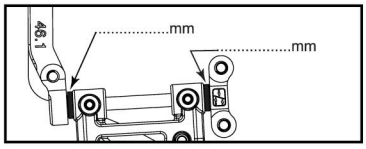

.....mm
.....mm



Medium ☐
Wide (kit) ☐

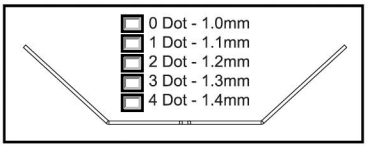

0 Dot - 1.0mm ☐
1 Dot - 1.1mm ☐
2 Dot - 1.2mm ☐
3 Dot - 1.3mm ☐
4 Dot - 1.4mm ☐



(2 Pip shown)

0 Groove ☐
1 Groove ☐
2 Groove ☐

Washers
.....mm

WheelBase
Short ☐
Middle ☐
Long ☐



Washers
.....mm



Washers
.....mm



Alloy ☐ Steel ☐

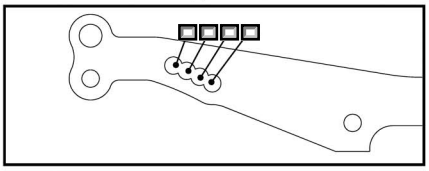

Droop.....mm
On 10mm Block ☐
Ride Height .....mm
Camber.....°
Pivot Block Strap ☐



44.2 ☐ 45.5 ☐ 46.1 ☐



Washers
.....mm

Shims.....mm

Line In ☐
Line Out ☐

Shims
.....mm



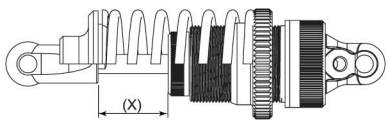

(X)

Cap Type Vented ☐ Sealed ☐ Emulsion ☐
Oil.....cTs
Spring.....
Piston.....
Drilled Yes ☐ No ☐
Drilled piston Hole Size.....mm
Shock Length (X).....mm
Rebound .....%



Peripheral Damping
Yes ☐
No ☐