Driver Details

NAME
DATE
EVENT / TRACK
WEATHER
RESULT
FASTEST LAP TIME

Chassis and Electrics

CHASSIS	Mid ☐	Alloy ☐	Carbon ☐
TOP DECK	Vertical ☐	Horizontal ☐	
BODYSHELL			
WING			
E.S.C			
SERVO			
RECEIVER			
LIPO			

Track Conditions

GRIP LEVEL	High ☐	Medium ☐	Low ☐
TYPE	Tight ☐	Open ☐	Mixed ☐
SURFACE	Carpet ☐	Tarmac ☐	
CONDITION	Smooth ☐	Bumpy ☐	
AIR TEMPERATURE	°C °F	TRACK TEMPERATURE	°C °F
VENUE	Indoor ☐	Outdoor ☐	

Motor and Gearing


MOTOR
ROTOR DIAMETER
TIMING
GEAR PITCH 48DP ☐ 64DP ☐
SPUR SIZE
PINION SIZE

NOTES


Wheels, Tyres and Inserts


WHEELS
TYRES
INSERTS
TYRE ADDITIVE
ADDITIVE TIME Front Minutes Rear Minutes
TYRE WARMERS Yes ☐ No ☐ Temp °C Time Minutes


Topdeck Options

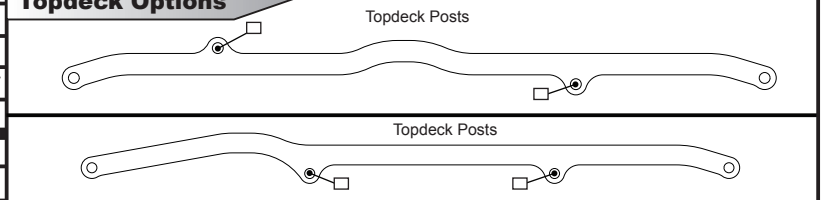


Front



☐ Spool
☐ Gear Diff
Diff Oil ..... cTs








Yes ☐
No ☐




























Peripheral Damping
Yes ☐
No ☐



Cap Type Vented ☐ Sealed ☐ Emulsion ☐
Oil.....cTs
Spring.....
Piston.....
Drilled Yes ☐ No ☐
Drilled piston Hole Size.....mm
Shock Length (X).....mm
Rebound .....%


☐ Narrow
☐ Medium (kit)
☐ Wide

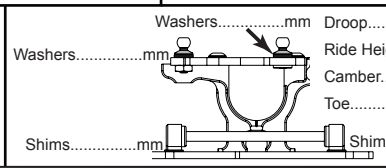



Droop.....mm (on 1.6mm droop gauge spacer)
Ride Height .....mm
Camber.....°
Toe.....°


Pivot Pin Insert


	Front	Rear
0.25 In	☐	☐
0.25 Out	☐	☐
0.75 In	☐	☐
0.75 Out	☐	☐


Rear



Diff Oil ..... cTs




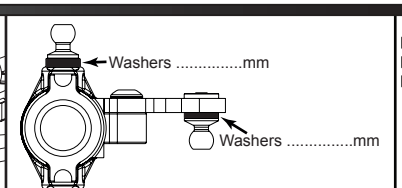























Peripheral Damping
Yes ☐
No ☐

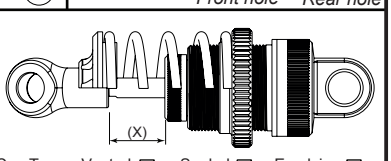

Cap Type Vented ☐ Sealed ☐ Emulsion ☐
Oil.....cTs
Spring.....
Piston.....
Drilled Yes ☐ No ☐
Drilled piston Hole Size.....mm
Shock Length (X).....mm
Rebound .....%


☐ Narrow
☐ Medium (kit)
☐ Wide

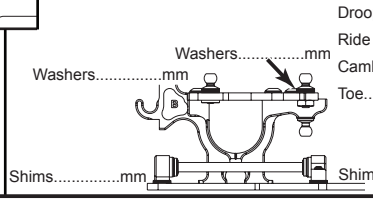

Droop.....mm (on 1.6mm droop gauge spacer)
Ride Height .....mm
Camber.....°
Toe.....°

Pivot Pin Insert

	Front	Rear
0.25 In	☐	☐
0.25 Out	☐	☐
0.75 In	☐	☐
0.75 Out	☐	☐