SET UP

TRACK SIZE	☐ OPEN	☐ MEDIUM	☐ TIGHT	TEMP. F° / °C			
TRACK TRACTION	☐ HIGH	☐ MEDIUM	☐ LOW	AIR		TRACK	
TRACK SURFACE	☐ SMOOTH	☐ MEDIUM	☐ BUMPY	LAPS			
TRACK TYPE	☐ HARD PACKED	☐ SOFT DIRT	☐ CLAY	BEST LAPTIME			
	☐ BLUE GROOVE	☐ ASTRO TURF	☐ GRASS	QUALI RESULT			
TRACK CONDITION	☐ DRY	☐ DUSTY	☐ WETT	RACE RESULT			

DIFFERENTIAL OIL

FRONT	CENTER	REAR
CST	CST	CST

TRANSMISSION SET UP

PINION	T	SPUR GEAR	T
FINAL DRIVE RATIO		ROLLOUT	mm
MOTOR		TIMING	
ROTOR		ARMATURE	
ESC		BATTERIES	

BRUSHLESS	PROGRAM	PUNCH	INITIAL BRAKE	AUTO BRAKE

BODY - WING

BODY	
WING	

SHOCKS

FRONT	SPRING	REAR
☐	Orange	☐
☐	Red	☐
☐	Pink	☐
☐	Blue	☐
☐	Purple	☐
☐	Green	☐
☐	Other	☐
	OIL/CST	
	REBOUND %	

PISTON

○ OPEN — CLOSED ●

HOLES SIZE

☐	1.1MM	☐
☐	1.2MM	☐
☐	1.3MM	☐
☐	1.4 MM	☐
	OTHER	


TYRES

BRAND		
TYPE		
INSERT		
WHEELS		
STOCK ☐	BRAND	TYPE

COMMENTS


STEERING BLOCK ☐ PLASTIC ☐ ALU

CASTER BLOCK ☐ PLASTIC ☐ ALU

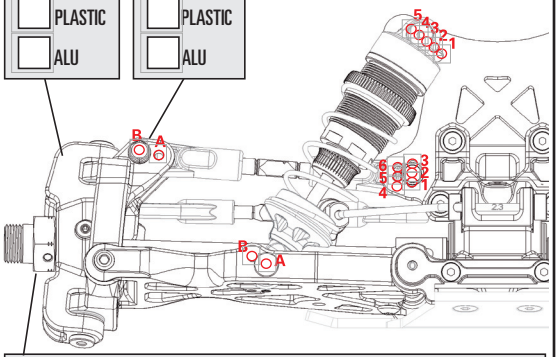

HEX ADAPTER ☐ 0mm ____ mm

UPRIGHT ☐ PLASTIC ☐ ALU

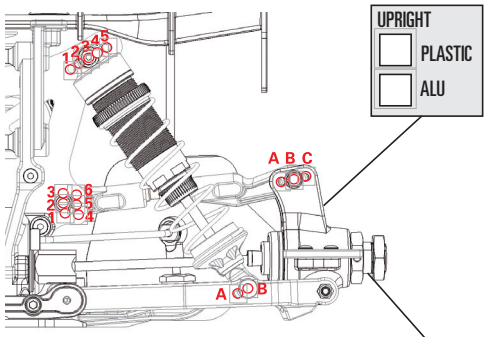


HEX ADAPTER -2mm

CASTER ____ °

☐ PLASTIC ☐ NYLON

SPINDLE ☐ HIGH ☐ LOW

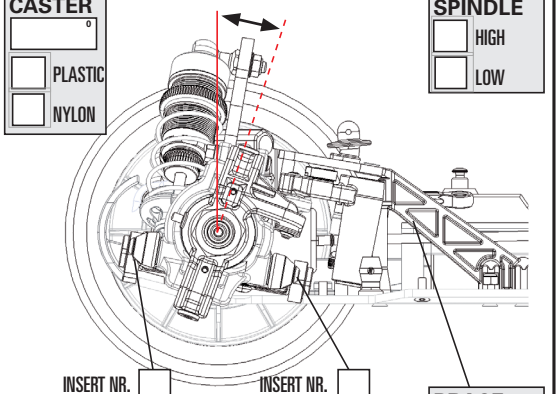


INSERT NR. ☐ UP ☐ DOWN

INSERT NR. ☐ UP ☐ DOWN

BRACE ☐ PLASTIC ☐ ALU

BRACE ☐ PLASTIC ☐ ALU

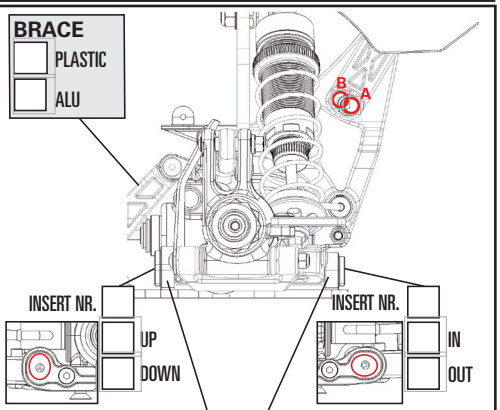

INSERT NR. ☐ UP ☐ DOWN

INSERT NR. ☐ IN ☐ OUT


☐ STANDARD BRACKET ☐ OPTIONAL TYPE ____

☐ STANDARD BRACKET ☐ OPTIONAL TYPE ____

OUT (-)

IN (+)

- ° + ° FRONT TOE

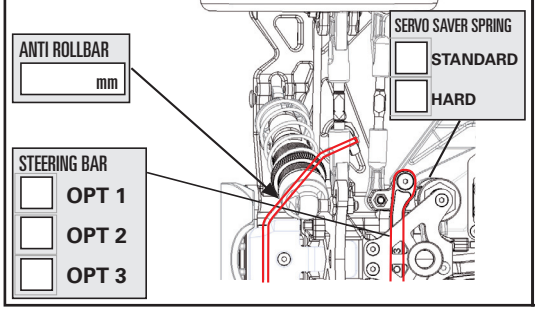


ANTI ROLLBAR ____ mm

SERVO SAVER SPRING ☐ STANDARD ☐ HARD

STEERING BAR ☐ OPT 1 ☐ OPT 2 ☐ OPT 3


WHEELBASE SHIMS ☐ ☐ ☐ ☐ 1.25 2.5 3.75 5mm

WING LOCATION IN mm ____

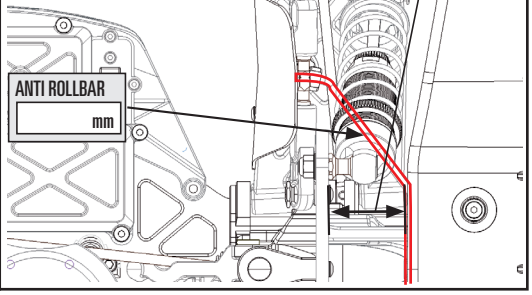

ANTI ROLLBAR ____ mm

FRONT CAMBER

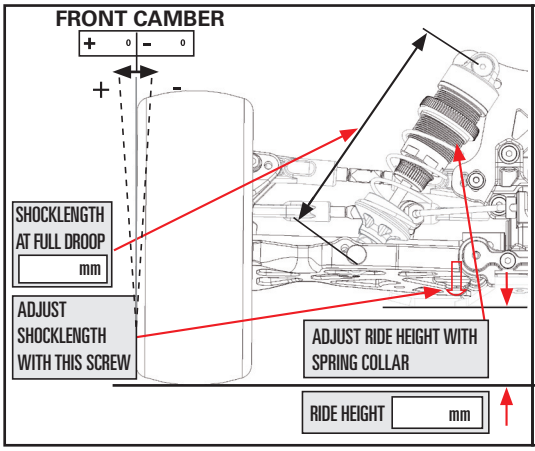


SHOCKLENGTH AT FULL DROOP ____ mm

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT ____ mm

REAR CAMBER

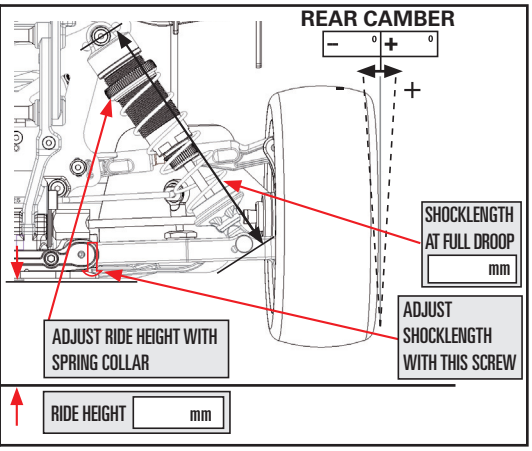

SHOCKLENGTH AT FULL DROOP ____ mm

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT ____ mm