SET-UP SHEET

XRAY T2'09

RACE	
TRACK	
NAME	
CITY / COUNTRY	
CONTACT	

DATE		TEMPERATURE / °F or °C	AIR	TRACK

QUALIFYING POSITION	BEST LAPTIME / sec	FINAL POSITION	RACE LENGTH / minutes

TRACK CONDITION	☐ CARPET	☐ ASPHALT	
	☐ TECHNICAL	☐ MIXED	☐ FAST
TRACTION	☐ LOW	☐ MEDIUM	☐ HIGH

FRONT	REAR
TRANSMISSION	

FRONT PULLEY			REAR PULLEY

DIFF.

FRONT DIFF.					REAR DIFF.				
☐ LOOSE	☐	☐ MEDIUM	☐	☐ TIGHT	☐ LOOSE	☐	☐ MEDIUM	☐	☐ TIGHT

ONE WAY DIFFERENTIAL	☐ YES	MIDDLE ONE WAY PULLEY	
SOLID ONE WAY DIFF.	☐ YES	FIXED ☐	ONE-WAY ☐
SOLID AXLE	☐ YES		

PINION / T		SPUR GEAR / T	
FINAL DRIVE RATIO		ROLLOUT	

FRONT	REAR
SHOCKS	

☐ ALU ☐ PLASTIC — ☐ ALU ☐ PLASTIC

XRAY SPRINGS

#308393	Super Soft	☐	YELLOW	☐	(D=1.4) 14 lb
#308384		☐	BLUE-GREEN	☐	(D=1.5) 15 lb
#308394	Soft	☐	WHITE	☐	(D=1.5) 17.5 lb
#308385		☐	LIGHT-BLUE	☐	(D=1.6) 20 lb
#308395	Soft Medium	☐	BLUE	☐	(D=1.6) 22.5 lb
#308386		☐	DARK-BLUE	☐	(D=1.7) 25 lb
#308396	Medium	☐	VIOLET	☐	(D=1.7) 28 lb
#308387		☐	LIGHT-PURPLE	☐	(D=1.8) 30 lb
#308397	Medium Hard	☐	PURPLE	☐	(D=1.8) 33 lb
#308388		☐	LIGHT-RED	☐	(D=1.9) 35 lb
#308398	Hard	☐	RED	☐	(D=1.9) 38 lb

#308373	☐	C 2.2	☐
#308374	☐	C 2.4	☐
#308375	☐	C 2.6	☐
#308376	☐	C 2.8	☐
#308377	☐	C 3.0	☐
#308378	☐	C 3.2	☐
#308379	☐	C 3.4	☐

	OTHER SPRING	
	OIL / CST	
	LENGTH / mm	
	PRELOAD / mm	
	REBOUND %	
☐ YES ☐ NO	FOAM INSERTS	☐ YES ☐ NO
☐ YES ☐ NO	O-RING ON SHAFT	☐ YES ☐ NO

○ OPENED
● CLOSED

HOLES IN PISTON

ANTI-ROLL BAR

THICKNESS / mm		THICKNESS / mm

	TIRES	
	DIAMETER / mm	
	INSERTS	
	ADDITIVE	


TREATED AREA — FRONT LEFT, FRONT RIGHT, REAR LEFT, REAR RIGHT


	WHEELS	
S ☐ M ☐ H ☐	HARDNESS	S ☐ M ☐ H ☐


MOTOR	ARMATURE	
	+ SPRING -	
	+ BRUSH COMP. -	


ESC		BATTERIES	
BRUSHLESS	PROGRAM	PUNCH	INITIAL BRAKE / AUTO BRAKE
BODY		WING	


● ☒ - APPLIED S -SOFT M -MEDIUM H -HARD

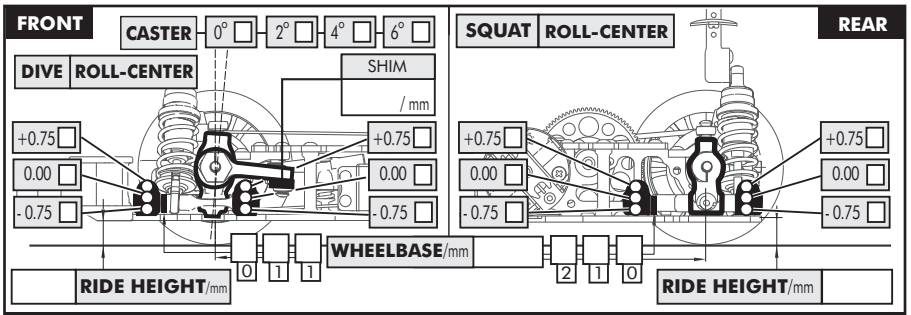


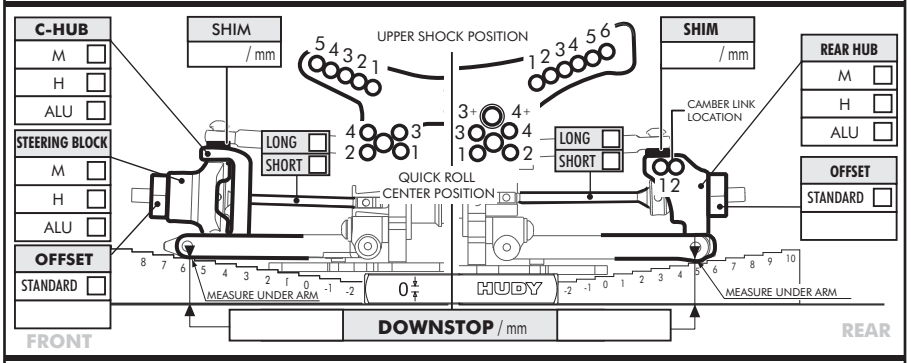

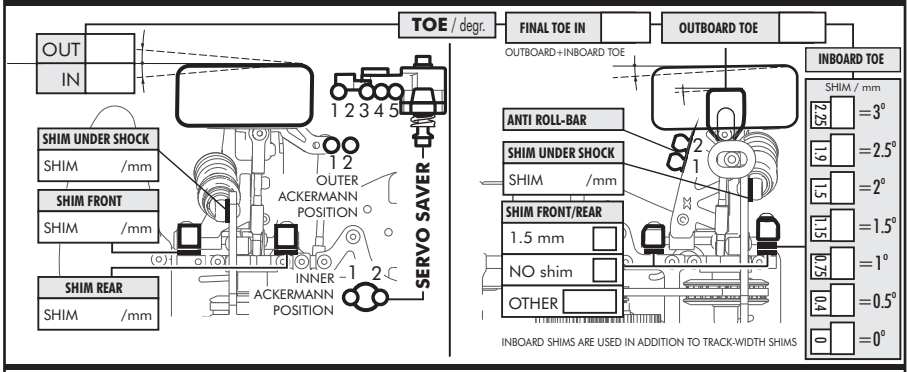

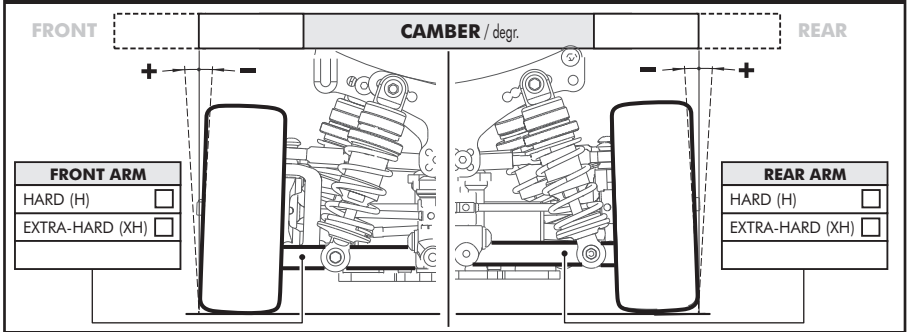

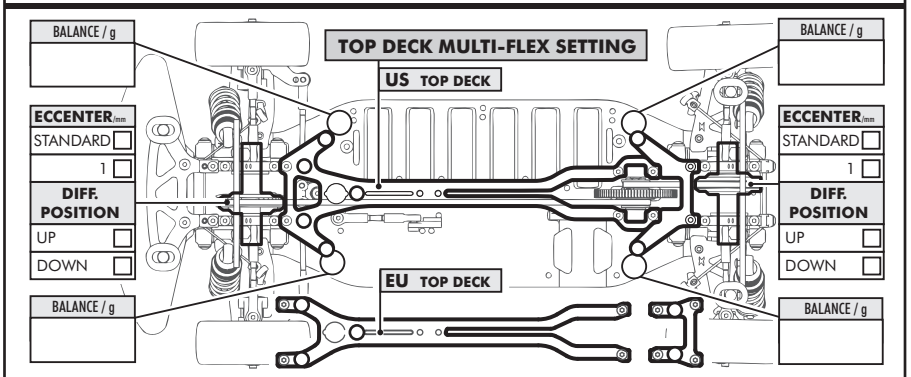

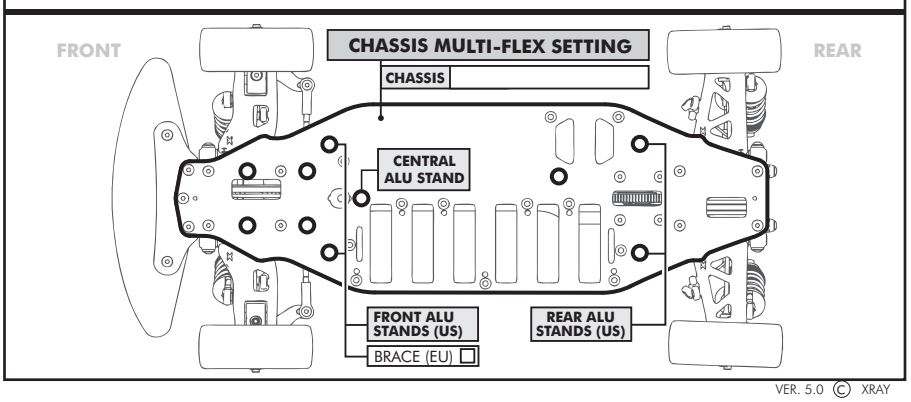

VER. 5.0 © XRAY